

Our new design compact enclosures



More Functional

Our experience is to ease challenging conditions. We offer practical and comfortable solutions with a broad range of ergonomic designs and accessories.

More Accessible

We combined our expertise with technology. You can now access all our solutions via QR code whenever you need them.



More Aesthetic


The Radius corner structure gives our enclosures a modern and elegant design, offering an aesthetic look and distinct style.



Safer

Our next-generation compact enclosures were manufactured with automatic welding by state-of-the-art robots. They offer a longer service life and higher durability with their robust and safe structure.



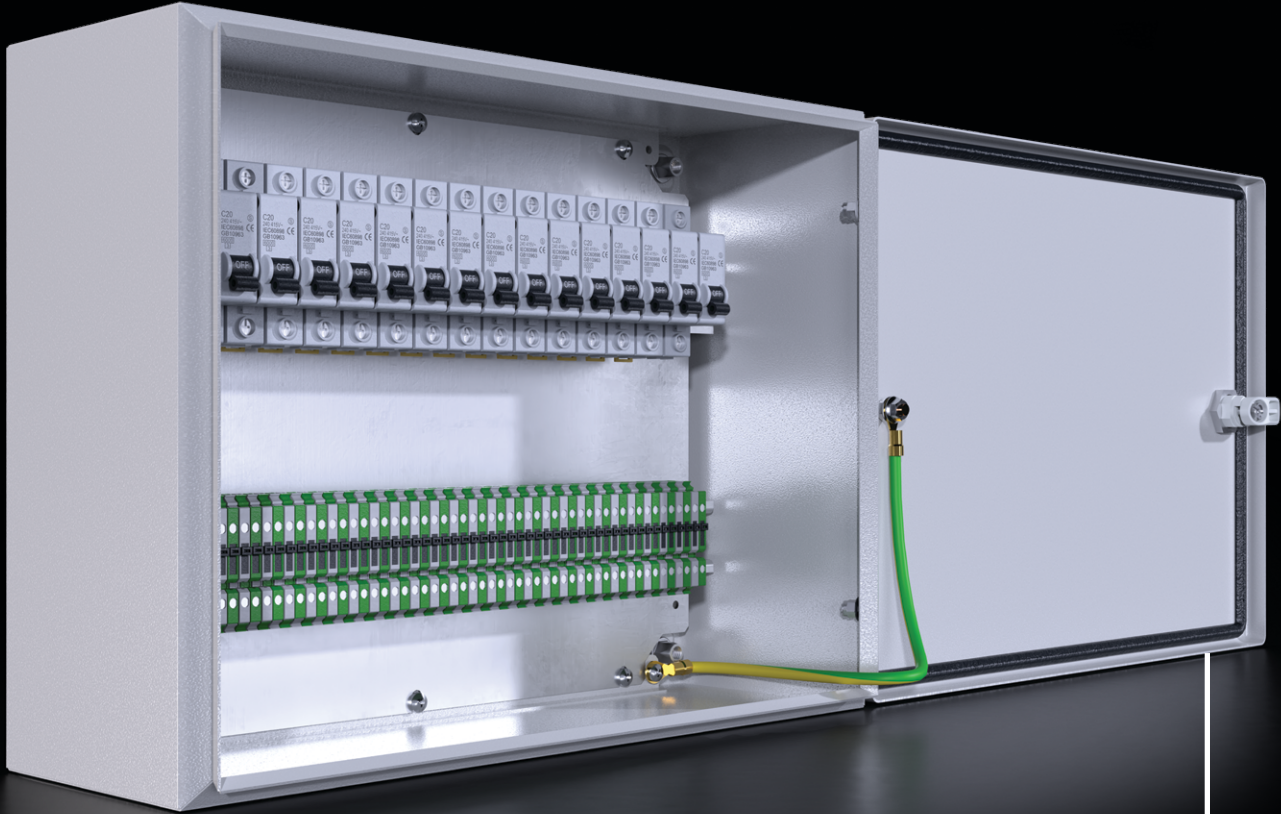



Earthing integration easy access with 180° opening hinge



Externally attachable wall bracket



Large interior volume with thin curved body structure

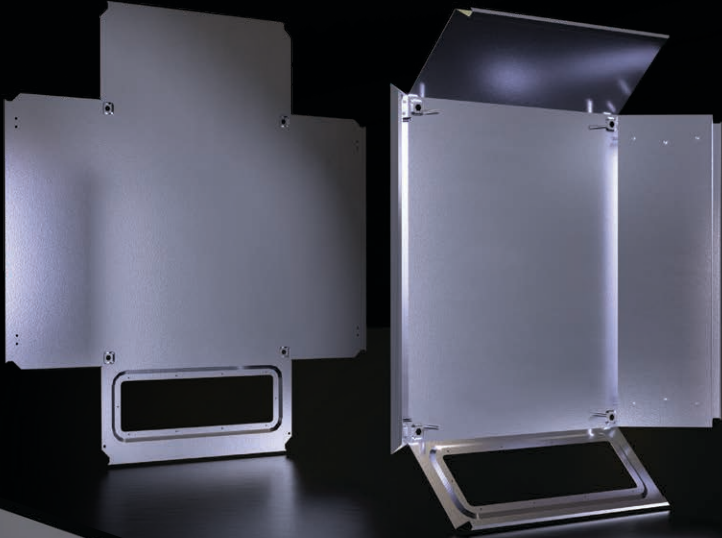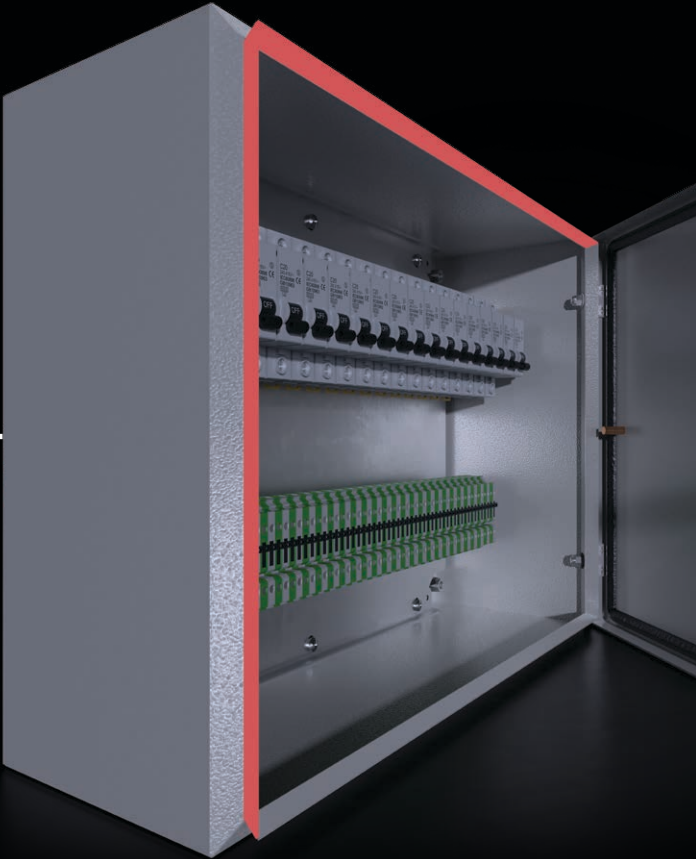

Automatic-welded, compact & durable enclosure body



Modern and stylish look with Radius corner structure

DM-SMALL ENCLOSURE



- Materials

: Body and Door Mild Steel
Mounting Plate Galvanized Steel
- Surface Finishing

: Nano Plating + Electrostatic
Powder Coating RAL 7035
- IP Rate

: IEC EN 60529 IP 66
- NEMA Rate

: NEMA 4
- IK Rate

: IK 07
- Standards

: IEC 62208 (Enclosure Standards)
- Corrosion Rate


: C3-M based on TS EN ISO 12944-2v
- Warranty

: KYT-72
- Supply Includes

: Body, Hinged Door, Mounting Plate,
Assembly Parts
- Please see page 383 for technical drawings.

ACCESSORIES:

Wall Bracket p.: 55

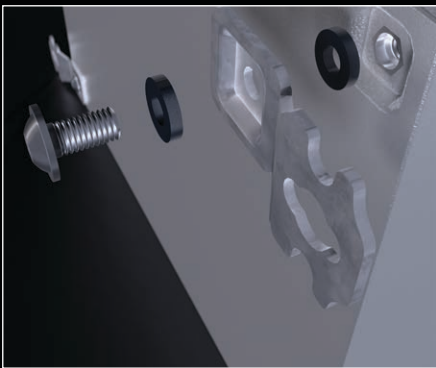


Other Accessories p.: 50

Earthing Cable p.: 71



DM-SMALL ENCLOSURE

PRODUCT CODE	ENCLOSURE				MOUNTING PLATE		STEEL THICKNESSES			DOOR	
	W*	H*	D*	WEIGHT	W	H	BODY	DOOR	MOUNTING PLATE	LOCK	HINGE
	mm	mm	mm	kg	mm	mm	mm	mm	mm	pcs.	pcs.
DM 232.201	200	200	150	3,29	175	185	1,2	1,2	2	1	2
DM 232.251	200	250	150	3,77	175	235	1,2	1,2	2	1	2
DM 232.215	250	250	150	4,33	225	235	1,2	1,2	2	1	2
DM 232.315	250	300	150	4,90	225	285	1,2	1,2	2	1	2
DM 232.351	250	350	150	5,47	225	335	1,2	1,2	2	1	2
DM 233.315	300	300	150	5,55	275	285	1,2	1,2	2	1	2
DM 233.415	300	400	150	6,86	275	385	1,2	1,2	2	1	2
DM 234.315	400	300	150	6,84	375	285	1,2	1,2	2	1	2




Version 1




Catalogue



Assembly Instructions

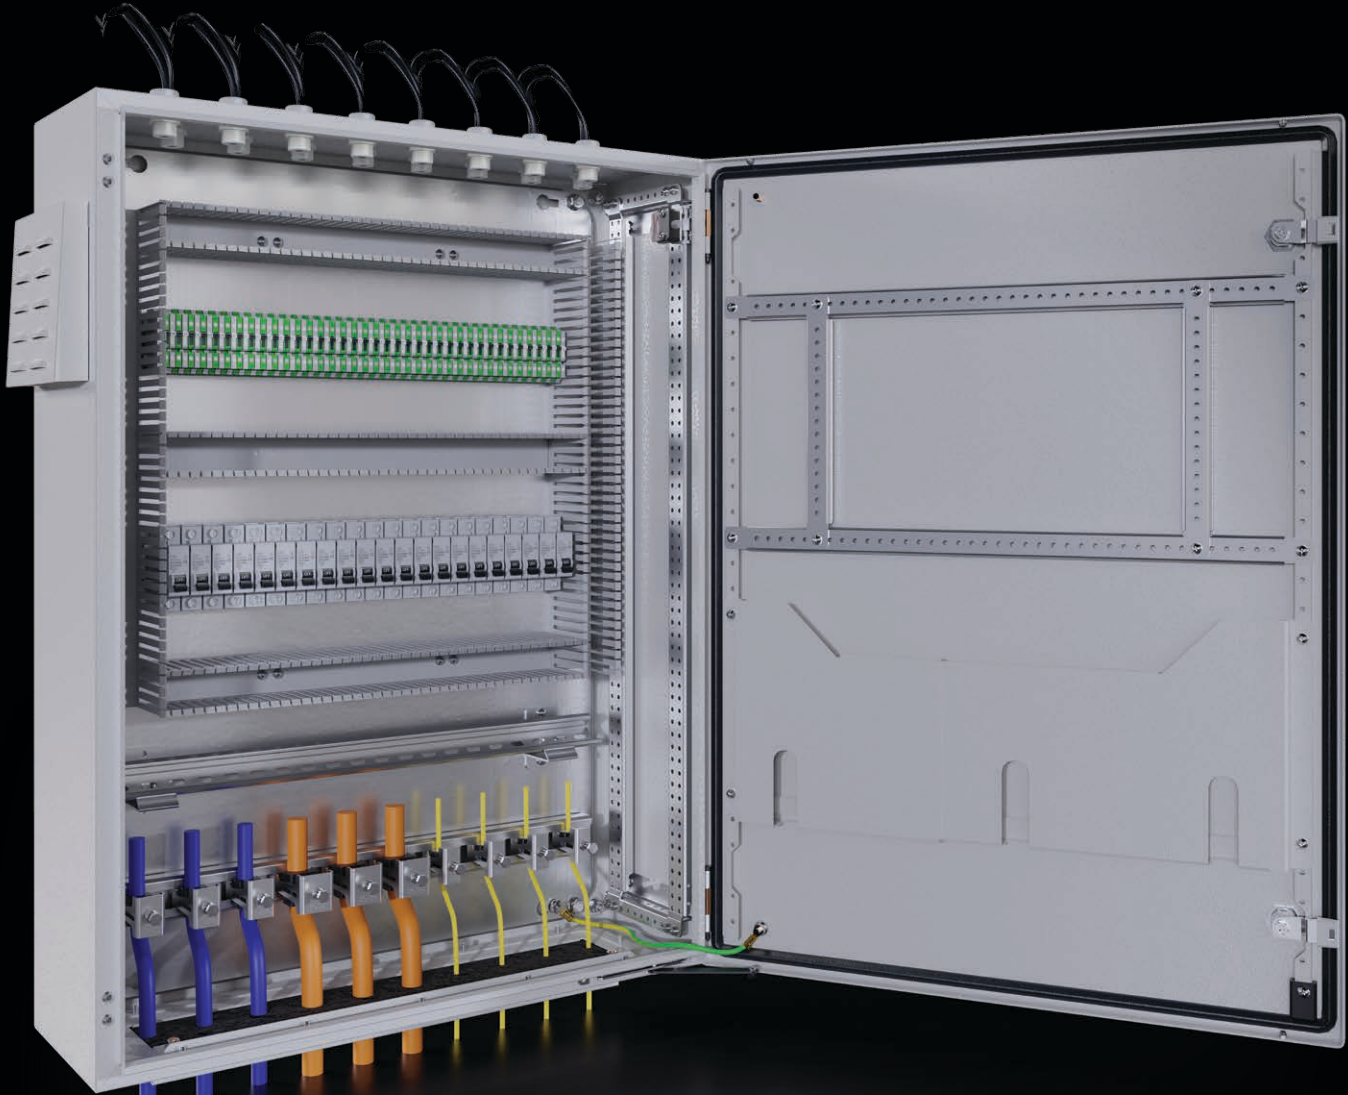

Large interior volume and wide door applications with thin curved body structure

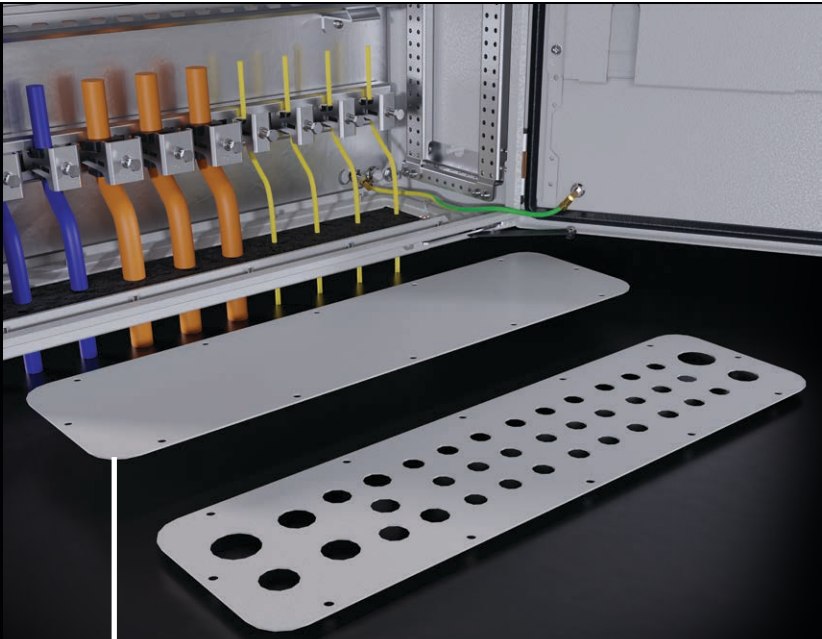

Gland plate structure with a flat and wide usage area and earthing integration. Safety and functionality with cable management options. Earthing integration




Stylish and modern look with Radius corner design

Continuous rain protection with roof option



Pole Mounting Feature

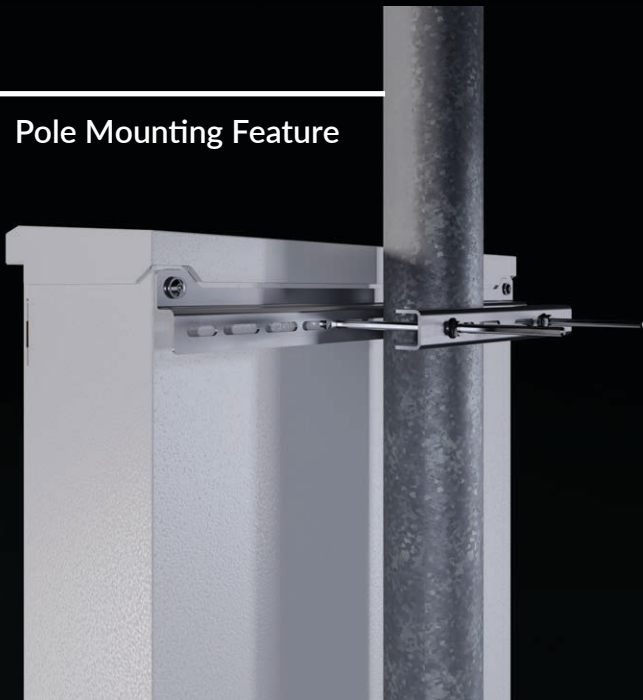

Operational use with glazed doors and internal covers





Strong 3-point lock structure




Door stability with door support part



Static durability with curved mounting plate



Easy mounting plate assembly

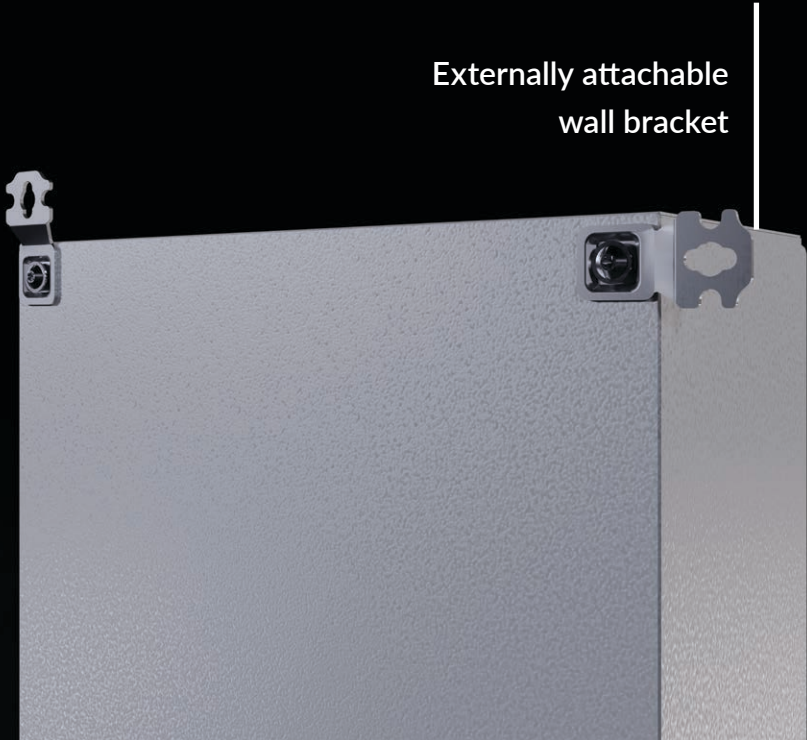

Externally attachable wall bracket



Automatic-welded, compact and durable body.

DM-MEDIUM SOLID DOOR ENCLOSURE



- Materials

: Body, Front Door, Gland Plate Mild Steel
Mounting Plate Galvanized Steel
- Surface Finishing

: Nano Plating + Electrostatic Powder Coating RAL 7035
- IP Rate

: IEC EN 60529
Single Door: IP 66
Double Door: IP 54
- NEMA Rate

: Single Door: NEMA 4
Double Door: NEMA 12
- IK Rate

: IK 10
- ATTENTION

: DM 252.321 and all of our products with a depth of 150 mm are without gland plate.
- Standards

: IEC 62208 (Enclosure Standards)
- Corrosion Rate

: C3-M based on TS EN ISO 12944-2
- Warranty



: KYT-72
- Supply Includes

: Body, Hinged Door, Gland Plate, Mounting Plate, Assembly Parts
- Please see page 384 for technical drawings.

ACCESSORIES:

Wall Bracket p.: 55


Earthing Cable p.: 71

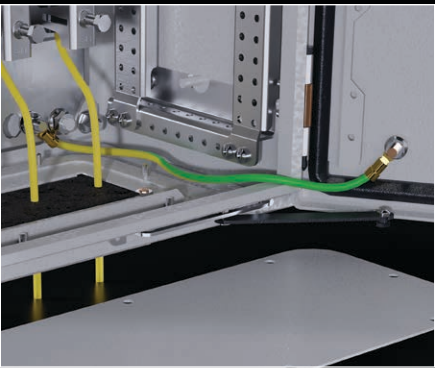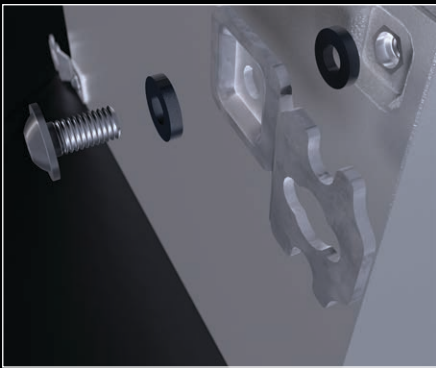


Other Accessories p.: 50

DM-MEDIUM SOLID DOOR ENCLOSURE

PRODUCT CODE	ENCLOSURE				MOUNTING PLATE		STEEL THICKNESSES			DOOR		
	W*	H*	D*	WEIGHT	W	H	BODY	DOOR	MOUNTING PLATE	LOCK	HINGE	VERSION
	mm	mm	mm	kg	mm	mm	mm	mm	mm	pcs.	pcs.	
DM 252.315	250	300	150	5,09	200	275	1,2	1,2	2	1	2	1
DM 252.321	250	300	210	6,58	200	275	1,2	1,2	2	1	2	1
DM 252.351	250	350	150	5,66	200	325	1,2	1,2	2	1	2	1
DM 253.315	300	300	150	5,75	250	275	1,2	1,2	2	1	2	1
DM 253.321	300	300	210	7,29	250	275	1,2	1,2	2	1	2	1
DM 253.415	300	400	150	7,06	250	375	1,2	1,2	2	1	2	1
DM 253.421	300	400	210	8,71	250	375	1,2	1,2	2	1	2	1
DM 253.521	300	500	210	10,13	250	475	1,2	1,2	2	2	2	2
DM 254.315	400	300	150	7,07	350	275	1,2	1,2	2	1	2	1
DM 254.421	400	400	210	10,49	350	375	1,2	1,2	2	1	2	1
DM 254.515	400	500	150	10,37	350	475	1,2	1,2	2	2	2	2
DM 254.521	400	500	210	12,25	350	475	1,2	1,2	2	2	2	2
DM 254.526	400	500	260	14,02	350	475	1,2	1,2	2	2	2	2
DM 254.530	400	500	300	15,57	350	475	1,2	1,2	2	2	2	2
DM 254.615	400	600	150	12,02	350	575	1,2	1,2	2	2	2	2
DM 254.621	400	600	210	14,01	350	575	1,2	1,2	2	2	2	2
DM 254.626	400	600	260	15,88	350	575	1,2	1,2	2	2	2	2
DM 254.630	400	600	300	17,51	350	575	1,2	1,2	2	2	2	2
DM 254.830	400	800	300	27,06	350	775	1,2	1,5	2	2	2	2



Version 1



Version 2




Catalogue



Assembly Instructions

DM-MEDIUM SOLID DOOR ENCLOSURE

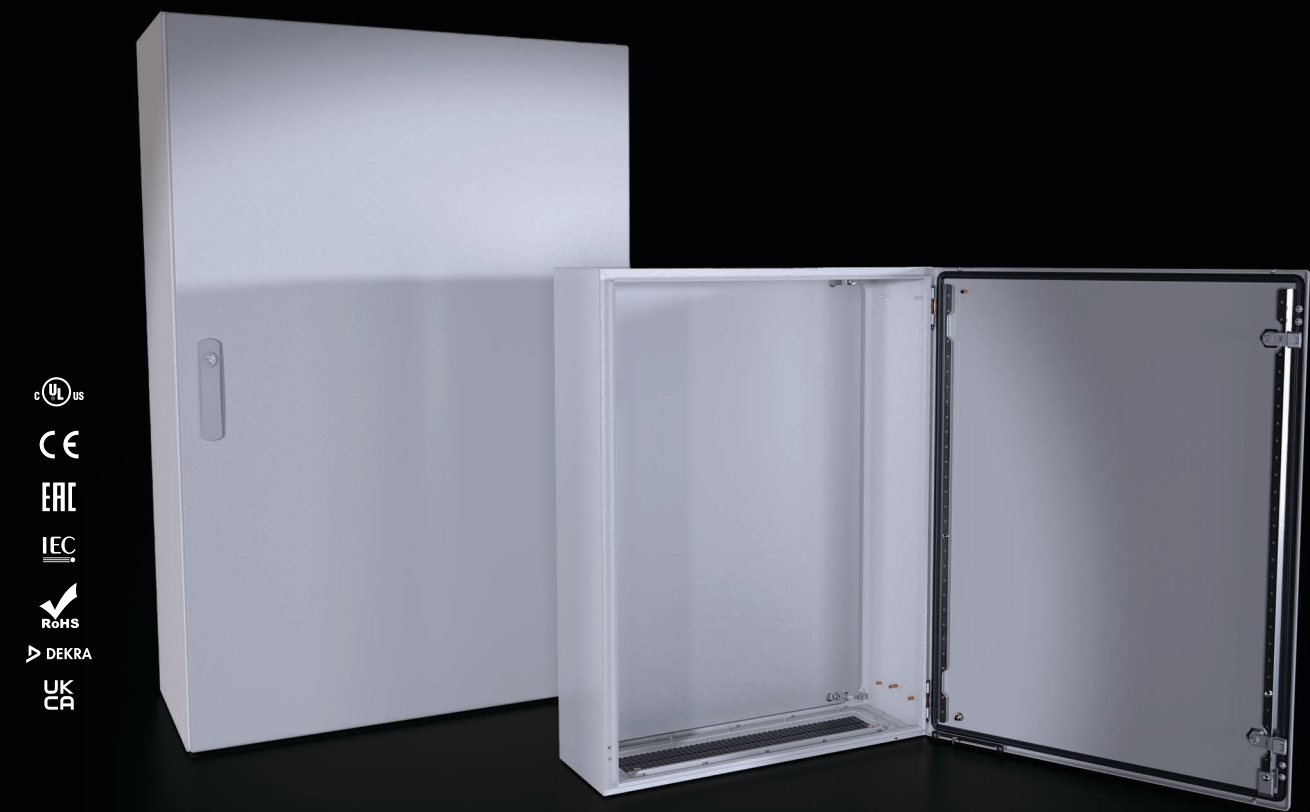

- Materials

: Body, Front Door,
Gland Plate Mild Steel
Mounting Plate Galvanized Steel
- Surface Finishing

: Nano Plating + Electrostatic
Powder Coating RAL 7035
- IP Rate

: IEC EN 60529
Single Door IP66
Double Door IP 54
- NEMA Rate

: Single Door: NEMA 4
Double Door: NEMA 12
- IK Rate

: IK 10
- Standards

: IEC 62208 (Enclosure Standards)
- Corrosion Rate


: C3-M based on TS EN ISO 12944-2
- Warranty

: KYT-72
- Supply Includes


: Body, Hinged Door, Gland Plate,
Mounting Plate, Assembly Parts
- Please see page 384 for technical drawings.

DM-MEDIUM SOLID DOOR ENCLOSURE


PRODUCT CODE	ENCLOSURE				MOUNTING PLATE		STEEL THICKNESSES			DOOR		
	W*	H*	D*	WEIGHT	W	H	BODY	DOOR	MOUNTING PLATE	LOCK	HINGE	VERSION
	mm	mm	mm	kg	mm	mm	mm	mm	mm	pcs.	pcs.	
DM 255.421	500	400	210	12,26	450	375	1,2	1,2	2	2	2	1
DM 255.521	500	500	210	14,37	450	475	1,2	1,2	2	2	2	2
DM 255.530	500	500	300	18,50	450	475	1,2	1,2	2	2	2	2
DM 255.615	500	600	150	15,12	450	575	1,2	1,2	2	2	2	2
DM 255.621	500	600	210	17,22	450	575	1,2	1,5	2	2	2	2
DM 255.626	500	600	260	19,18	450	575	1,2	1,5	2	2	2	2
DM 255.630	500	600	300	20,89	450	575	1,2	1,5	2	2	2	2
DM 255.721	500	700	210	19,45	450	675	1,2	1,5	2	2	2	2
DM 255.726	500	700	260	21,50	450	675	1,2	1,5	2	2	2	2
DM 256.421	600	400	210	14,84	550	375	1,2	1,5	2	2	2	1
DM 256.621	600	600	210	20,07	550	575	1,2	1,5	2	2	2	2
DM 256.630	600	600	300	23,90	550	575	1,2	1,5	2	2	2	2
DM 256.640	600	600	400	28,88	550	575	1,2	1,5	2	2	2	2
DM 256.821	600	800	210	30,23	550	775	1,5	2	2	2	3	2
DM 256.826	600	800	260	33,03	550	775	1,5	2	2	2	3	2
DM 256.830	600	800	300	35,43	550	775	1,5	2	2	2	2	2
DM 256.840	600	800	400	42,11	550	775	1,5	2	2	2	2	2
DM 256.126	600	1000	260	39,47	550	975	1,5	2	2	2	3	3
DM 256.130	600	1000	300	42,06	550	975	1,5	2	2	2	3	3
DM 256.123	600	1200	300	48,69	550	1175	1,5	2	2	1	3	5
DM 258.630	800	600	300	29,50	750	575	1,2	2	2	2	2	2
DM 258.632	800	600	300	29,50	750	575	1,2	2	2	4	4	4
DM 258.821	800	800	210	38,18	750	775	1,5	2	2	2	2	2
DM 258.830	800	800	300	43,80	750	775	1,5	2	2	2	2	2
DM 258.126	800	1000	260	49,37	750	975	1,5	2	2	2	3	3
DM 258.130	800	1000	300	53,62	750	975	1,5	2	2	2	3	3
DM 258.123	800	1200	300	62,30	750	1175	1,5	2	2	1	3	5




Version 1




Version 2



Version 3



Version 4



Version 5

Catalogue

Assembly Instructions

DM-MEDIUM GLAZED DOOR ENCLOSURE



Materials : Body, Front Door, Gland Plate Mild Steel, 4-mm Transparent Tempered Glass

Surface Finishing : Nano Plating + Electrostatic Powder Coating RAL 7035

IP Rate : IEC EN 60529 IP 66

NEMA Rate : NEMA 4

IK Rate : IK 08

Standards : IEC 62208 (Enclosure Standards)

Corrosion Rate : C3-M based on TS EN ISO 12944-2


Warranty : KYT-72

Supply Includes : Body, Glazed Hinged Door, Gland Plate, Assembly Parts


Please see page 386 for technical drawings.

ACCESSORIES:


Wall Bracket p.: 55

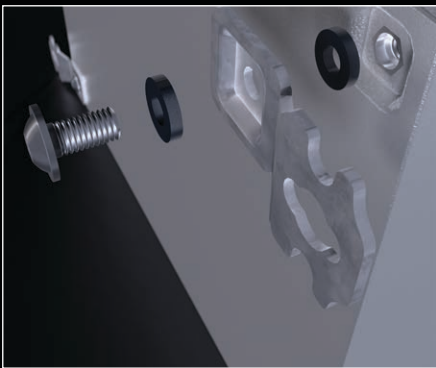

Mounting Plate p.: 60

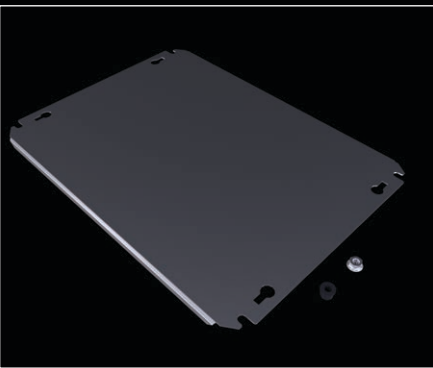


Earthing Cable p.: 71

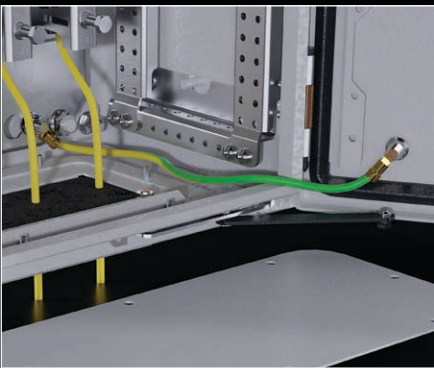


Other Accessories p.: 50

DM-MEDIUM GLAZED DOOR ENCLOSURE


PRODUCT CODE	ENCLOSURE				MOUNTING PLATE		STEEL THICKNESSES		DOOR		
	W*	H*	D*	WEIGHT	W	H	BODY	DOOR	LOCK	HINGE	VERSION
	mm	mm	mm	kg	mm	mm	mm	mm	pcs.	pcs.	
DM 274.521	400	500	210	9,54	350	475	1,2	1,2	2	2	1
DM 274.530	400	500	300	12,87	350	475	1,2	1,2	2	2	1
DM 274.621	400	600	210	10,73	350	575	1,2	1,2	2	2	1
DM 274.630	400	600	300	14,23	350	575	1,2	1,2	2	2	1
DM 275.621	500	600	210	13,04	450	575	1,2	1,5	2	2	1
DM 275.630	500	600	300	16,70	450	575	1,2	1,5	2	2	1
DM 275.721	500	700	210	14,53	450	675	1,2	1,5	2	2	1
DM 275.726	500	700	260	16,59	450	675	1,2	1,5	2	2	1
DM 276.621	600	600	210	14,74	550	575	1,2	1,5	2	2	1
DM 276.630	600	600	300	18,58	550	575	1,2	1,5	2	2	1
DM 276.821	600	800	210	23,08	550	775	1,5	2	2	2	1
DM 276.830	600	800	300	28,29	550	775	1,5	2	2	2	1
DM 276.126	600	1000	260	30,50	550	975	1,5	2	2	3	2
DM 276.130	600	1000	300	33,10	550	975	1,5	2	2	3	2
DM 276.123	600	1200	300	37,90	550	1175	1,5	2	1	3	3
DM 278.130	800	1000	300	40,10	750	975	1,5	2	2	3	2
DM 278.123	800	1200	300	46,00	750	1175	1,5	2	1	3	3



Version 1



Version 2



Version 3

Catalogue

Assembly Instructions



Large interior volume with thin curved body structure.
Wide door application area



Easy mounting plate assembly
and support system


Earthing integration



Externally attachable
wall bracket



Static durability with curved
mounting plate

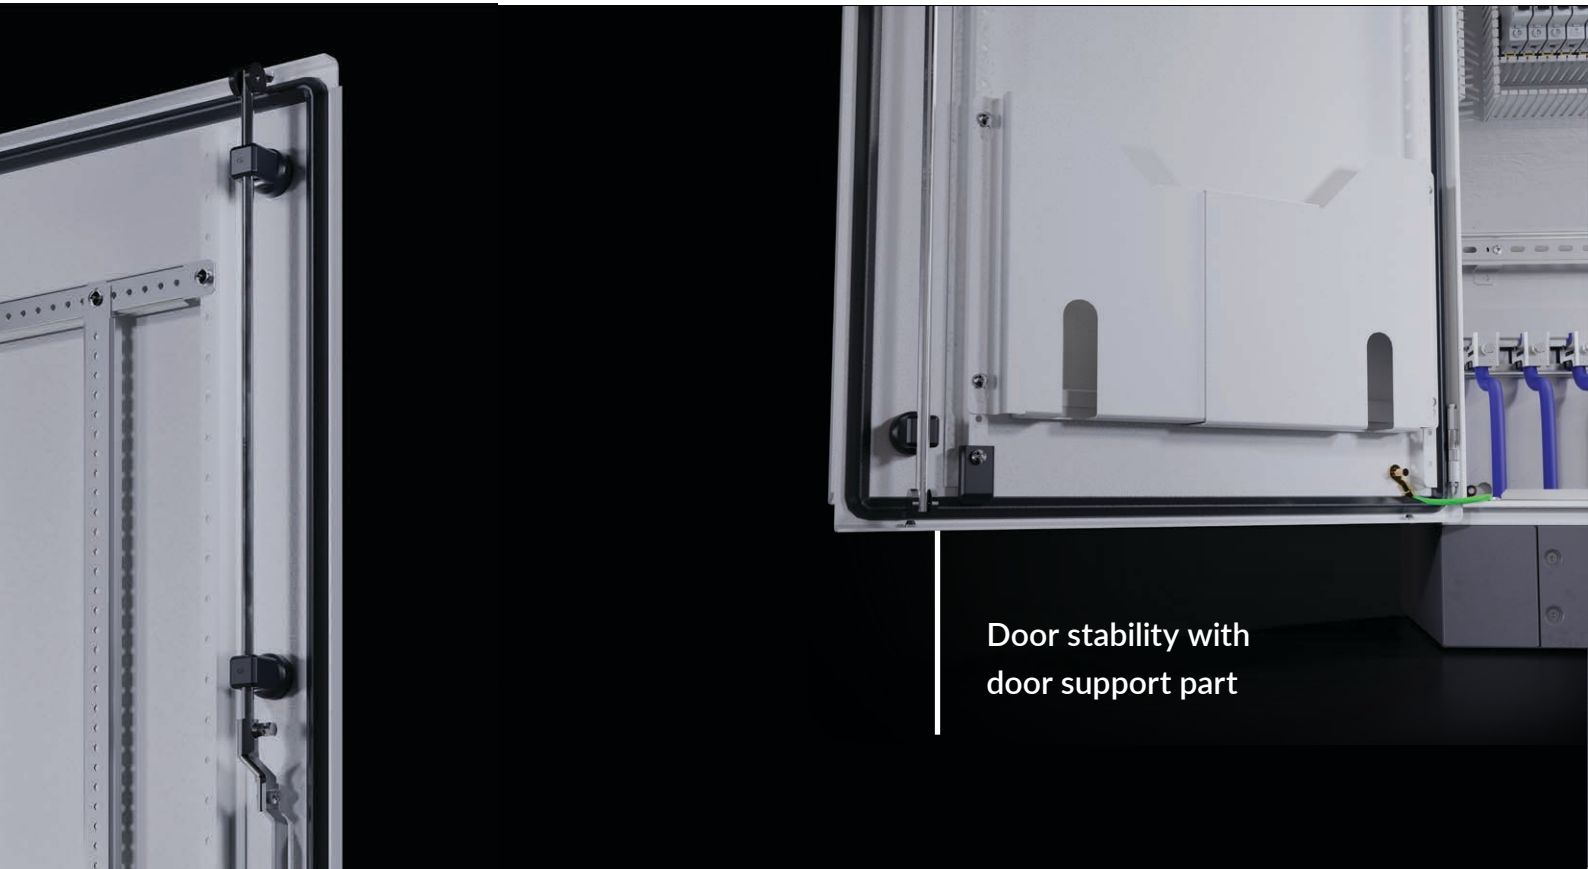

Door stability with door support part




Strong 3-point lock structure



Floor standing compatibility with ready-to-use plinth holes



Modern and stylish look with Radius corner

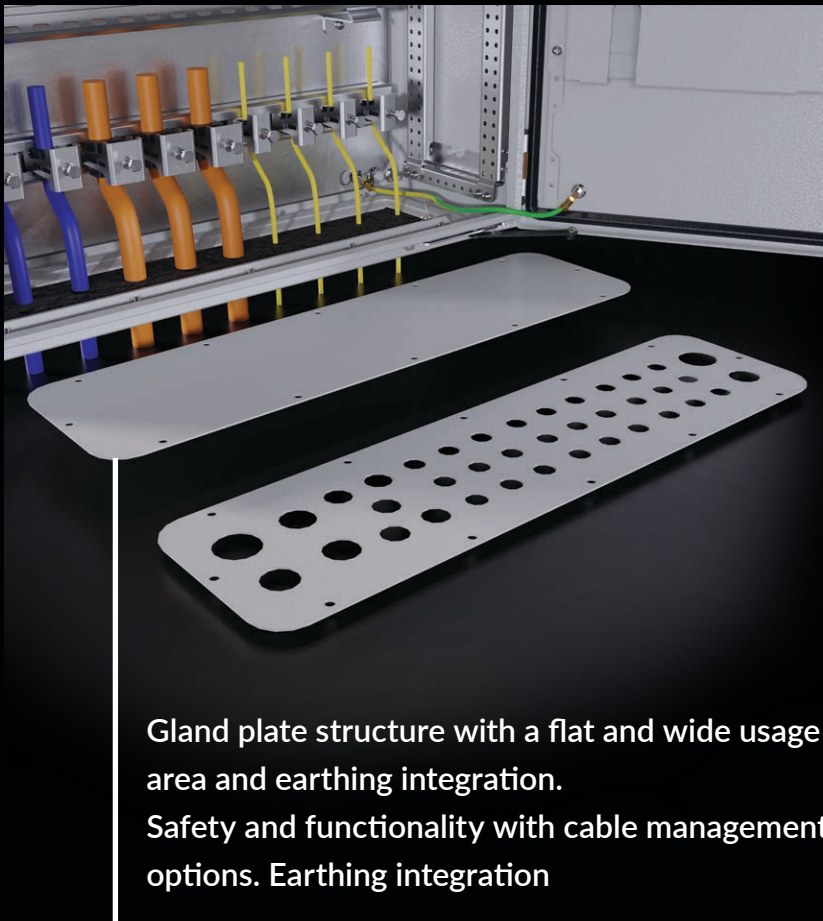

Gland plate structure with a flat and wide usage area and earthing integration. Safety and functionality with cable management options. Earthing integration

Continuous rain protection with roof option

DM-LARGE ENCLOSURE



Materials : Body, Front Door, Gland Plate Mild Steel Mounting Plate Galvanized Steel

Surface Finishing : Nano Plating + Electrostatic Powder Coating RAL 7035

IP Rate : IEC EN 60529
Single Door: IP 66
Double Door: IP 54

NEMA Rate : Single Door: NEMA 4
Double Door: NEMA 12

IK Rate : IK 10

Standards : IEC 62208 (Enclosure Standards)

Corrosion Rate : C3-M based on TS EN ISO 12944-2


Warranty : KYT-72

Supply Includes : Body, Hinged Door, Gland Plate, Mounting Plate, Assembly Parts

Please see page 387 for technical drawings.

ACCESSORIES:

Wall Bracket p.: 55

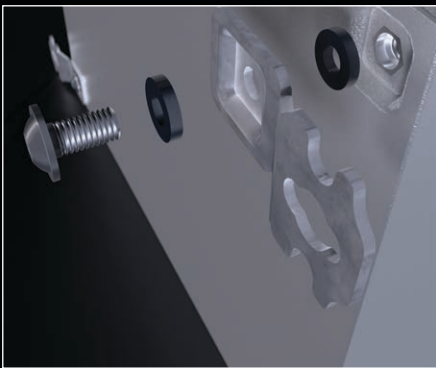

Other Accessories p.: 50


Earthing Cable p.: 71




DM-LARGE ENCLOSURE

Product Code	ENCLOSURE				MOUNTING PLATE		STEEL THICKNESS			DOOR		VERSION
	Width(W)	Height(H)	Depth(D)	Weight	Width(W)	Height(H)	Enclosure	Door	M.Plates	Lock	Hinge	
	mm	mm	mm	kg	mm	mm	mm	mm	mm	pcs.	pcs.	
DM 246.140	600	1000	400	36,73	550	975	1,5	2	2	2	3	3
DM 246.124	600	1200	400	13,83	550	1175	1,5	2	2	1	3	5
DM 248.140	800	1000	400	45,55	750	975	1,5	2	2	2	3	3
DM 248.124	800	1200	400	54,36	750	1175	1,5	2	2	1	3	5
DM 241.130	1000	1000	300	57,81	950	975	1,5	2	2	4	6	4
DM 241.123	1000	1200	300	68,07	950	1175	1,5	2	2	2	6	6
DM 241.143	1000	1400	300	78,33	950	1375	1,5	2	2	2	6	6
DM 241.144	1000	1400	400	81,80	950	1375	1,5	2	2	2	6	6
DM 241.830	1200	800	300	54,63	1150	775	1,5	2	2	4	4	4
DM 241.840	1200	800	400	59,68	1150	775	1,5	2	2	4	4	4
DM 241.230	1200	1200	300	78,60	1150	1175	1,5	2	2	2	6	6
DM 241.140	1200	1200	400	81,60	1150	1175	1,5	2	2	2	6	6


* Interital Lock Systems




Version 3



Version 5



Version 4



Version 6



Catalogue



Assembly Instructions