

## DM STAINLESS STEEL (AISI 304) WALL MOUNTED ENCLSOURE



**Material** : Enclosure and Door: Stainless steel AISI 304 (1.4301)  
Mounting Plate : Galvanized Steel

Surface process : Brushed

**Lock** : Quarter Turn Locks : RAL 7037 ABS case with AISI 316 5mm Double-bit Insert  
Swing Handle : Die Cast Zinc + RAL 7037 Powder coating with 5mm Double-bit zinc insert

IP Rate : Single Doors : IP 66 regarding to IEC 60 529  
Double Doors : IP 54 regarding to IEC 60 529

**NEMA Category :** Single Doors : NEMA 1, 3R, 4, 4X, 12  
Double Doors : NEMA 1, 12

**Supply includes :** Enclosure and hinged door with opening angle 120°  
Mounting plate, lock(s) and 5mm doublebit key

- Available to use mostly the same accessories with DM serie

- Bottom side of the enclosure is solid (without gland plate)


- The rear of the enclosure side is solid.  
(without bracket hole cutout)

- Please see page 404-405 for technical drawings.

Wall Bracket Page : 338




Earthing Cable Page : 71

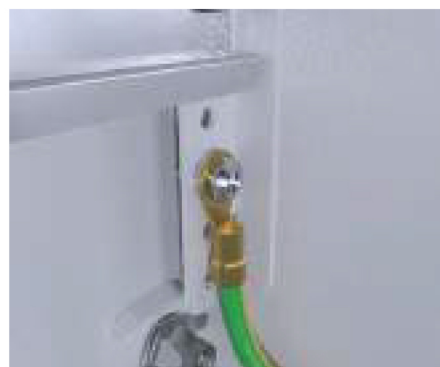


Other Accessories Page : 338-341

## DM STAINLESS STEEL (AISI 304) WALL MOUNTED ENCLSOURE


| Product Code   | ENCLOSURE |            |           |        | MOUNTING PLATE |            | STEEL THICKNESS |      |          | DOOR |       | Version |
|----------------|-----------|------------|-----------|--------|----------------|------------|-----------------|------|----------|------|-------|---------|
|                | Width (W) | Height (H) | Depth (D) | Weight | Width (W)      | Height (H) | Enclosure       | Door | M.Plates | Lock | Hinge |         |
|                | mm        | mm         | mm        | kg     | mm             | mm         | mm              | mm   | mm       | pcs  | pcs   |         |
| DM 252.315-SS4 | 250       | 300        | 150       | 5,19   | 200            | 275        | 1,2             | 1,2  | 2        | 1    | 2     | 1       |
| DM 253.321-SS4 | 300       | 300        | 210       | 7,44   | 250            | 275        | 1,2             | 1,2  | 2        | 1    | 2     | 1       |
| DM 253.415-SS4 | 300       | 400        | 150       | 7,20   | 250            | 375        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 253.421-SS4 | 300       | 400        | 210       | 8,88   | 250            | 375        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 254.315-SS4 | 400       | 300        | 150       | 7,21   | 350            | 275        | 1,2             | 1,2  | 2        | 1    | 2     | 1       |
| DM 254.421-SS4 | 400       | 400        | 210       | 10,70  | 350            | 375        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 254.521-SS4 | 400       | 500        | 210       | 12,50  | 350            | 475        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 254.621-SS4 | 400       | 600        | 210       | 14,29  | 350            | 575        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 255.521-SS4 | 500       | 500        | 210       | 14,66  | 450            | 475        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 255.530-SS4 | 500       | 500        | 300       | 18,87  | 450            | 475        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 255.721-SS4 | 500       | 700        | 210       | 18,94  | 450            | 675        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 255.726-SS4 | 500       | 700        | 260       | 21,01  | 450            | 675        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 256.421-SS4 | 600       | 400        | 210       | 14,51  | 550            | 375        | 1,2             | 1,2  | 2        | 2    | 2     | 2       |
| DM 256.621-SS4 | 600       | 600        | 210       | 20,47  | 550            | 575        | 1,2             | 1,5  | 2        | 2    | 2     | 2       |
| DM 256.630-SS4 | 600       | 600        | 300       | 22,54  | 550            | 575        | 1,2             | 1,5  | 2        | 2    | 2     | 2       |
| DM 256.821-SS4 | 600       | 800        | 210       | 30,83  | 550            | 775        | 1,5             | 2    | 2        | 2    | 2     | 2       |
| DM 256.830-SS4 | 600       | 800        | 300       | 36,14  | 550            | 775        | 1,5             | 2    | 2        | 2    | 2     | 2       |
| DM 256.130-SS4 | 600       | 1000       | 300       | 42,90  | 550            | 975        | 1,5             | 2    | 2        | 2    | 3     | 3       |
| DM 258.830-SS4 | 800       | 800        | 300       | 44,68  | 750            | 775        | 1,5             | 2    | 2        | 2    | 2     | 2       |
| DM 258.130-SS4 | 800       | 1000       | 300       | 53,20  | 750            | 975        | 1,5             | 2    | 2        | 2    | 3     | 3       |
| DM 258.123-SS4 | 800       | 1200       | 300       | 61,72  | 750            | 1175       | 1,5             | 2    | 2        | S/H  | 3     | 5       |
| DM 281.130-SS4 | 1000      | 1000       | 300       | 58,97  | 950            | 975        | 1,5             | 2    | 2        | 4    | 6     | 4       |
| DM 281.123-SS4 | 1000      | 1200       | 300       | 69,43  | 950            | 1175       | 1,5             | 2    | 2        | S/H  | 6     | 6       |




## Version 1




## Version 2




## Version 3



Version 4



Version 5



Version 6