

# STAINLESS STEEL ENCLOSURES

## KMT-1000 AND KMT-2000 STAINLESS CONTROL DESKS



**Material** : Body, panels: 1,50 mm 304 stainless steel  
Plinth corner: 2,00 mm 304 stainless steel  
Bottom panel: 1,50 mm 304 stainless steel  
Mounting panel: 2,00 mm galvanized steel

▶ Please contact the customer service for 316 steel sheet application or varnish-coated surface process.

▶ Please see page 198-199 for technical drawings.


**Surface process** : Natural stainless surface application

**IP Protection** : IP 55

**Supply includes** :


**For KMT-1000:** 1 pcs back-closed main body, 1 pcs top panel with damper, 1 pcs bottom door, gland plate with foam, 1 pcs mounting plate, 1 set of 100mm plinth

**For KMT-2000:** 1 pcs open-back main body, 1 pcs top panel with damper, 1 pcs bottom door, 1 pcs rear door, gland plate with foam, 2 pcs mounting plate.

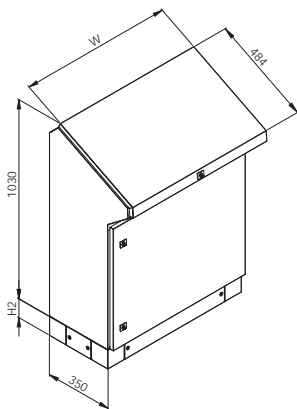

**KMT-1000 (Closed rear)**

ENCLOSURE WIDTH(W)	DOOR TYPE	REFERENCE NO
600	1	516.350.K
800	1	518.350.K
1000	2	510.350.K
1200	2	512.350.K

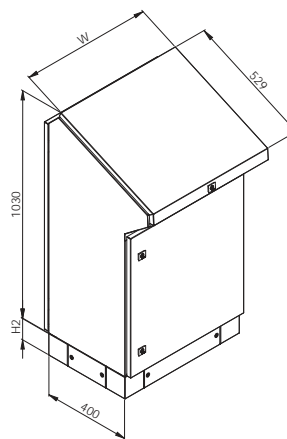

**KMT-2000 (Opened rear)**

ENCLOSURE WIDTH(W)	DOOR TYPE	REFERENCE NO
600	1 + 1	526.400.K
800	1 + 1	528.400.K
1000	2 + 2	520.400.K
1200	2 + 2	522.400.K